SCREWED END
3 WAY REDUCED PORT BALL VALVE

FELLBACH®

IT-3WAY TYPE

SIZE: 1/4"~2"


STAINLESS STEEL
AISI-316 (EN10213-4 1.4408) (ASTM-A351-CF8M)
AISI-304 (EN10213-4 1.4301) (ASTM-A351-CF8)
CARBON STEEL
S-20C (EN10213-2 1.0619) (ASTM-A216-WCB)



FEATURES: *Anti-static device
*Blow-out proof stem, Lever operated.
*1000 PSI (69 BAR) W.O.G.
*L port, T port


OPTION: Locking device
Direct Mounting Pad ISO 5211
Mounting pad for ISO 5211

ITEM	PARTS	MATERIALS
1	BODY	ASTM-A351-CF8M
2	CAP	ASTM-A351-CF8M
3	SEAT	PTFE+15%G/F
4	BALL BALLS	ASTM-A351-CF8M
5	STEM	S.S 316
6	GASKET	PTFE+15%G/F
7	THRUST WASHER	PTFE+15%G/F
8	STEM PACKING	PTFE+15%G/F
9	GLAND BUSH	S.S.304
10	BELLEVEILLE WASHER	SUS304-CSP
11	HADLE NUT	S.S.304
12	HANDLE	S.S.304
13	HANDLE NUT	S.S.304
14	STOP PIN	S.S.304
15	HANDLE SLEEVE	PLASTIC
16	STOP WASHER	S.S.304
17	THRUSP WASHER	PTFE+15%G/F
18	O-RING	VITON
19	END CAP	ASTM-A351-CF8M
20	GASKET	PTFE+15%G/F

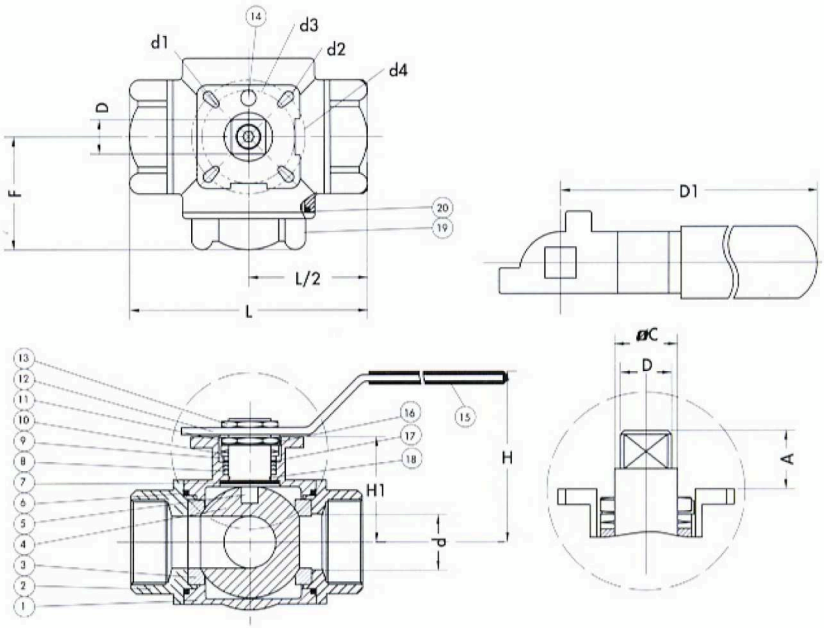

PORT / TYPE	1	2	3	4
L	1 2 3	1 2 3	1 2 3	1 2 3
T	1 2 3	1 2 3	1 2 3	1 2 3

PRESSURE TEMPERATURE RATINGS

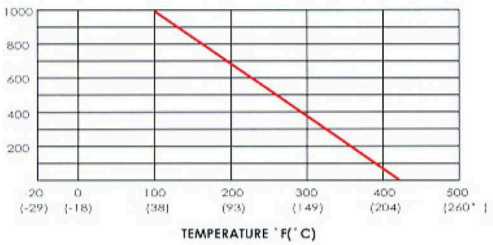

DIMENSIONS UNIT:mm

SIZE	d	L	H	D1	A	C	D	F	d1	d2	d3	d4	H1
1/4"	11.0	75.7	77.45	112	9	12	9	37.25	R3.0	R3.0	36	42	38.2
3/8"	11.0	75.7	77.45	112	9	12	9	37.25	R3.0	R3.0	36	42	38.2
1/2"	12.7	75.7	77.45	112	9	12	9	37.25	R3.0	R3.0	36	42	38.2
3/4"	16.0	86.6	82	112	9	12	9	44.7	R3.0	R3.5	36	42	45.2
1"	20.0	102.4	93.7	136.5	11	15.8	11	51.4	R3.0	R3.5	42	50	56.5
1-1/4"	25.0	118.2	101.1	188	11	15.8	11	57.7	R3.5	R4.6	42	50	61.9
1-1/2"	32.0	125.8	120.25	197.5	14.3	20.8	14	62.7	R3.5	R4.6	50	70	78.25
2"	38.1	149	129.85	197.5	14	20.8	14	74.6	R4.6	R5.7	50	70	87.35

VALVE TECHNOLOGY SYSTEMS WOGS
tel. +603 5191 4299
fax. +603-5191 7299
email: sales@wogscontrol.com
website: www.wogscontrol.com